


TDS

Ball valves

Stainless Steel, DN 16 to 50 KF

- Ball made from stainless steel
- Rugged and cost effective
- Simple opening and closing by lever
- Unobstructed passage
- Flanges : 16 KF to 50 KF

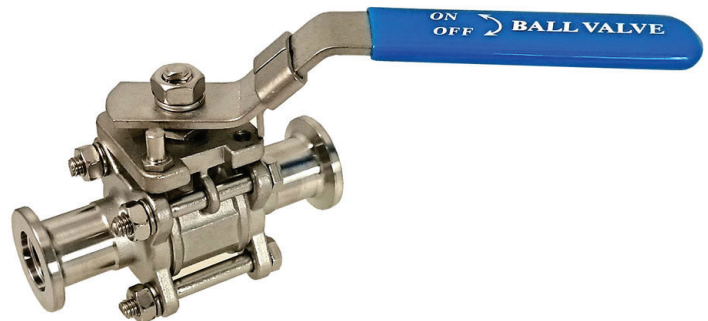

Specifications

		16 KF	25 KF	40 KF	50 KF
Tightness	mbar/ls	1×10^{-5}	1×10^{-5}	1×10^{-5}	1×10^{-5}
Conductance	l/s	3	9	30	50
Pressure min/max.	mbar/bar	$10^{-5} / 5$	$10^{-5} / 5$	$10^{-5} / 5$	$10^{-5} / 5$
Backeout temp.	°C	80	80	80	80
Housing		SS 316	SS 316	SS 316	SS 316
Seals		PTFE / Viton	PTFE / Viton	PTFE / Viton	PTFE / Viton
Weight	kg	0.6	1.2	2.4	3.8

P/N & Dimensions

Reference	A	B
NEVSBS-KF16-M	64.4 mm	92 mm
NEVSBS-KF25-M	92 mm	107 mm
NEVSBS-KF40-M	120.5 mm	130 mm
NEVSBS-KF50-M	134 mm	151 mm

