

BPG400 ATM to Ultra-High Vacuum Gauge

The INFICON Bayard-Alpert Pirani Combination Gauge, BPG400, functions as two gauges in a single compact unit measuring from 5×10^{-10} mbar to atmosphere (3.8×10^{-10} Torr to atmosphere). Combining technologies reduces the complexity of installation, setup, and integration. Choose the BPG400 for affordable and repeatable process to base pressure measurements in one economic package.



BENEFITS

- Extremely wide measurement range from 5×10^{-10} mbar to atmosphere (3.8×10^{-10} Torr to atmosphere)
- Excellent repeatability in the process pressure range from 10^{-8} ... 10^{-2} mbar of 5%
- The Pirani interlock protects the Bayard-Alpert system from premature filament burnout and excess contamination from high pressure operation
- Long-life yttrium oxide coated iridium filament
- Optional graphic display and Fieldbus interfaces available
- Automatic high vacuum Pirani adjustment reduces operator interventions
- RoHS compliance
- General vacuum measurement and control in the low to ultra high vacuum range

ORDERING INFORMATION

Type	BPG400
BPG400 DN 25 ISO-KF	353-500
BPG400 DN 40 CF-R	353-502
BPG400 LCD, DN 25 ISO-KF	353-501
BPG400 LCD, DN 40 CF-R	353-503
BPG400-SD DNet, DN 25 ISO-KF	353-507
BPG400-SD DNet, DN 40 CF-R	353-508
BPG400-SP PBus, DN 25 ISO-KF	353-505
BPG400-SP PBus, DN 40 CF-R	353-506

SPECIFICATIONS

Type	BPG400	
Measurement range (air, O ₂ , CO, N ₂)	mbar	5×10 ⁻¹⁰ ... 1000
Measurement range (air, O ₂ , CO, N ₂)	Torr	3.8×10 ⁻¹⁰ ... 750
Accuracy		
10 ⁻⁸ ... 10 ⁻² mbar	% of reading	±15
Repeatability		
10 ⁻⁸ ... 10 ⁻² mbar	% of reading	5
Degas (1)		
p < 7.2 × 10 ⁻⁶	mbar	electron bombardment, max. 3 min
Pressure, max.	bar (absolute)	2
Temperature		
Operation (ambient)	°C	0 ... +50
Storage	°C	-20 ... +70
Bakeout at flange with extension	°C	150
Bakeout at flange without extension	°C	80
Bakeout electronics removed	°C	150
Supply voltage	V (dc)	+20 ... +28
Supply voltage	A (dc)	0.8
Output signal analog		
Output signal	V	0 ... +10
Measurement range	V	+0.774 ... +10

SPECIFICATIONS

Type		BPG400
Error signal	V	0.3 / 0.5
Output signal analog		
Voltage vs. pressure	volts per decade	0.75
Output signal analog		
Load impedance, min.	kΩ	10
Interface (digital) (2)		RS232C
Electrical connection		D-Sub, 15-pin, male
Cable length, max. (3)	m (ft.)	100 (330)
Materials exposed to vacuum		Yt ₂ O ₃ , Ir, Pt, Mo, Cu, W, NiFe, NiCr, stainless steel, glass
Internal volume KF / CF	cm ³ (in. ³)	24 (1.46) / 34 (2.1)
Weight KF / CF	g	285 / 550
Degree of protection		IP30
Profibus DP		
Baud rates	kBaud	9.6 / 19.2 / 93.75 / 187.5 / 500
Profibus DP		
Baud rates	Mbaud	1.5 / 12
Profibus DP		
Address	2 switches (address 00 - 127) or network programmable	
Digital functions	read pressure, select units: Torr, mbar, Pa; degas function, Pirani full scale adjust, monitor gauge status, safe state allows definition of behavior in case of error, detailed alarm and warning infor	
Analog functions	0 ... 10 V analog output pressure indication, two setpoint relays A + B	
Setpoint relays: Number of setpoints		2
Setpoint relays: Relay contact		n.o., potential free
Connector for Profibus DP		D-Sub, 9-pin, female
Connector for BPG (analog output, supply voltage, setpoints)		D-Sub, 15-pin, male
Profibus DP		
Setpoint relays: Range	mbar	1×10 ⁻⁹ ... 100
Profibus DP		
Setpoint relays: Hysteresis	% of reading	10

SPECIFICATIONS

Type	BPG400	
Profibus DP		
Setpoint relays: Contact rating	V (dc)	60
Profibus DP		
Setpoint relays: Contact rating	A (dc)	0.5
DeviceNet™		
Protocol	DeviceNet™, group 2 slave only	
MAC ID	2 switches (address 00 - 63) or network programmable	
Digital functions	read pressure, select units: Torr, mbar, Pa , degas function, Pirani full scale adjust , monitor gauge status , safe state allows definition of behavior in case of error , detailed alarm and warning i	
Analog functions	0 ... 10 V analog output pressure indication , two setpoint relays A + B	
Specification	DeviceNet™ "Vacuum Gauge Device Profile"	
Device type	"CG" for combination gauge	
I / O slave messaging	polling only	
Setpoint relays: Number of setpoints	2	
Setpoint relays: Relay contact	n.o., potential free	
Connector for DeviceNet™	Microstyle, 5-pin	
Connector for BPG (analog output, supply voltage, setpoints)	D-Sub, 15-pin, male	
DeviceNet™		
Data rate switch	kBaud	125, 250, 500 or network programmable
DeviceNet™		
Cable length 125 kbps	m (ft.)	500 (1650)
Cable length 250 kbps	m (ft.)	250 (825)
Cable length 500 kbps	m (ft.)	100 (330)
DeviceNet™		
Setpoint relays: Range	mbar	1×10^{-9} ... 100
DeviceNet™		
Setpoint relays: Hysteresis	% of reading	10
DeviceNet™		
Setpoint relays: Contact rating	V (dc)	60

SPECIFICATIONS

Type		BPG400
Supply voltage for DeviceNet™	V (dc)	+11 ... +25
Supply voltage for gauge	V (dc)	+20 ... +28
DeviceNet™		
Setpoint relays: Contact rating	A (dc)	0.5
Supply voltage for DeviceNet™	A (dc)	0.5
Supply voltage for gauge	A (dc)	0.8

1) Reduced accuracy during degas

2) Simultaneous use of RS232C or VGC40x controller series and Fieldbus is not allowed

3) For RS232C operation <30m


SPAREPARTS

	BPG400
Spare sensor head BPG400, DN 25 ISO-KF	354-490
Spare sensor head BPG400, DN 40 CF-R	354-491

ACCESSORIES

	BPG400
100 mm sensor extension tube	353-510
Baffle for BPG400	353-512
Centering ring with baffle DN 25 KF	211-113
Power supply BPG400 24VDC	353-511

DIMENSIONS

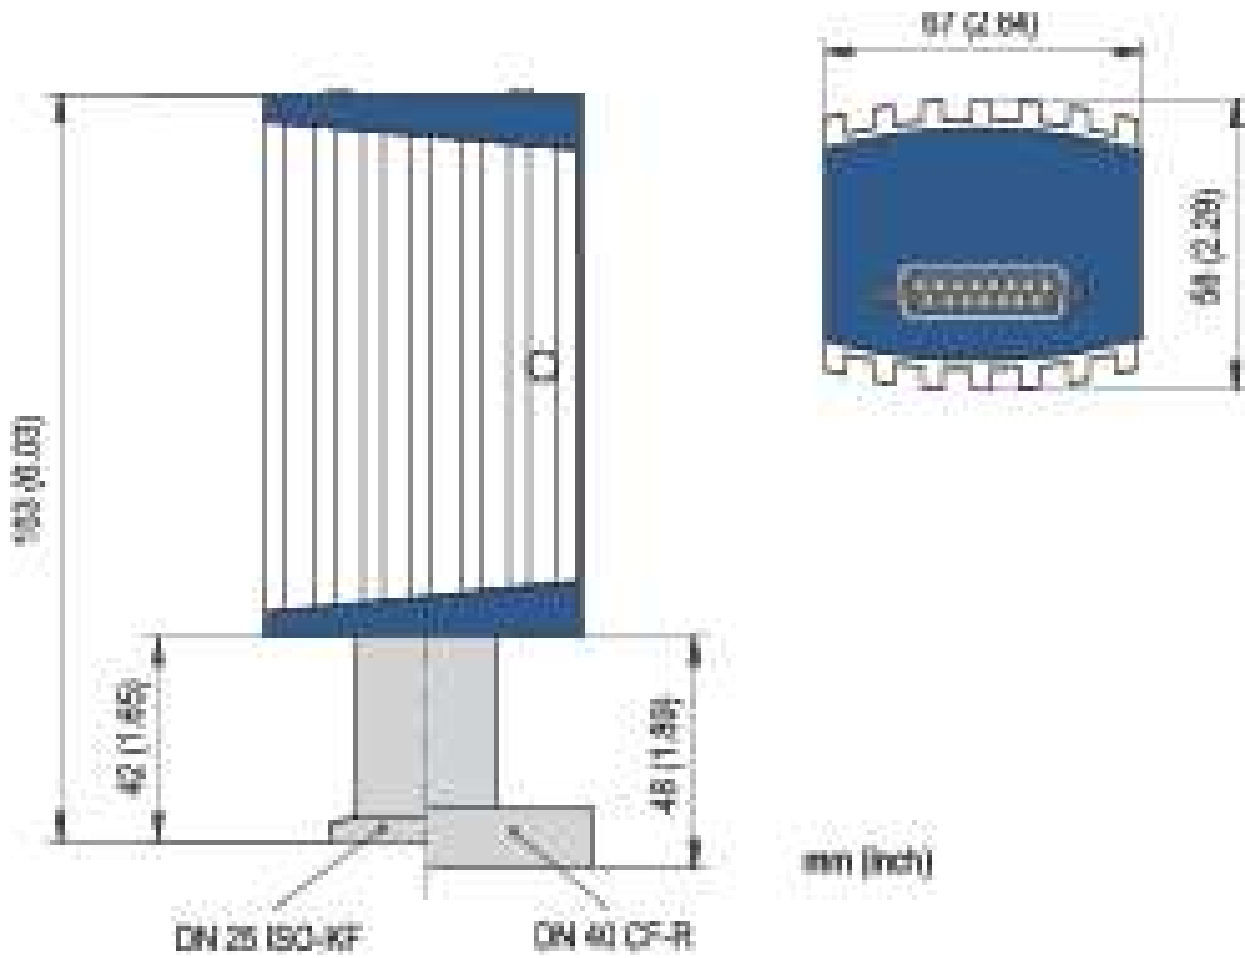

neyco